



Joint sands

Durable joint sealant thanks to unbound construction.



Joint sands

Durable joint sealant thanks to unbound construction.



StaLok W/A[®] joint sand

StaLok W/A[®] joint sand is a product for the final grouting of pavement and cobble coverings in unbound construction. It achieves a significantly more resistant joint seals compared to the conventional crushed-stone joint and without the risks of a rigid joint, because StaLok W/A[®] remains flexible.

Granulation: 0-2 mm

Color: Gray

Container: 25 kg / Sack
or in the big bag

Binder: water activating,
non-hardening

Advantages and properties of StaLok W/A[®] joint sand

- + no cracking (only unbound construction)
- + stabilized, non-rigid joint closure
(firm in dry conditions, wet in wet conditions)
- + permeable to water
- + salt-resistant, reduced weed growth
- + limitedly resistant to sweeping („gentle“ sweeping,
no or reduced suction)



Stabilizer joint sand

Stabilizer joint sand is a product for the final grouting of pavement and cobble coverings in unbound construction. A more durable joint seal is achieved compared to conventional crushed-stone joint and without the risks of a rigid joint, because Stabilizer does not create any grayish haze and remains adaptable.

Granulation: 0-2 mm


Color: Gray

Container: in Big Bag

Binder: water activating,
non-hardening

Advantages and characteristics of joint sand stabilizer

- + no cracking (only unbound construction)
- + stabilized, non-rigid joint closure
(firm in dry conditions, wet in wet conditions)
- + good water permeability
- + salt-resistant, reduced weed growth
- + limitedly resistant to sweeping („gentle“ sweeping,
no or reduced suction)

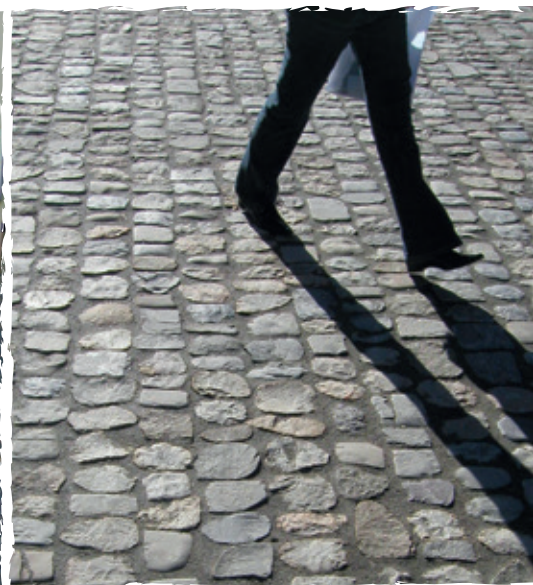

[www.stabilizer2000.com](http://www.stabilizer2000.com/en/joint-sand)
[/en/joint-sand](http://www.stabilizer2000.com/en/joint-sand)

STABILIZER 2000 GMBH

Steinerstrasse 11

CH- 4333 Münchwilen

Tel. +41 (041) 322 11 29

Fax +41 (041) 322 11 28

info@stabilizer2000.com